

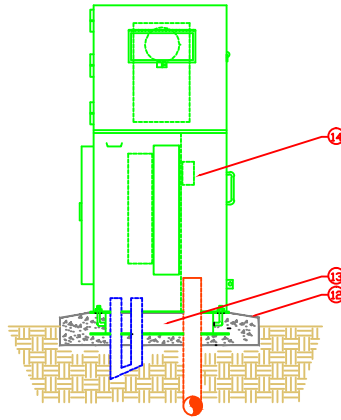


MPE-SERIES WITH ENCLOSURE  
INSTALLED ON CONCRETE PAD

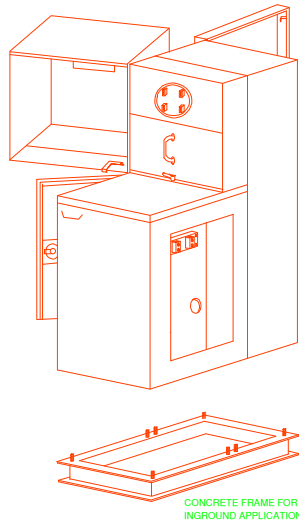


MPE-SERIES WITH ENCLOSURE  
INSTALLED WITH STRONGBOX  
QUICKPAD ( QP-MPE )

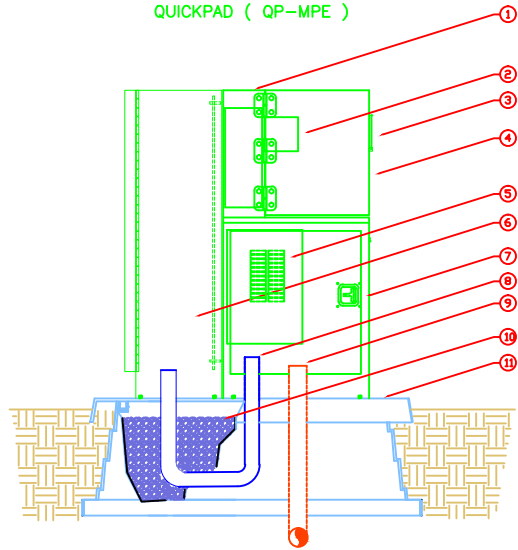

## LEGEND

1. STRONGBOX METER ENCLOSURE STAINLESS STEEL NEMA TYPE 3R MPE-SERIES 0-200AMP SERVICE
2. COMMERCIAL METER SOCKET 100A OR 200A WITH TEST BLOCKS
3. SERVICE METER VIEWING WINDOW
4. SIDE HINGED REMOVABLE FRONT LID
5. LOAD CENTER WITH MAIN BREAKER
6. STRONGBOX CONTROL ENCLOSURE FULL LENGTH FRONT DOOR, PADLOCKABLE, PART NO. SB-1852SS 18" x 52" x 12".
7. LOAD CENTER COMPARTMENT, GASKETED DOOR WITH T-HANDLE, PADLOCKABLE.
8. LOAD CONDUIT FROM LOAD CENTER SECTION INTO CUSTOMER ENCLOSURE SB-1852SS. MIN. 2" AS PER NEEDED
9. SERVICE LINE CONDUIT 3" FROM UTILITY TRANSFORMER. WIRE SIZE PER NEC STANDARDS FOR AMPERAGE LOAD.
10. PEA GRAVEL  $\frac{3}{4}$  FULL INSIDE QUICKPAD BASE
11. QUICKPAD MOUNTING PAD. POWDER COATED ALUMINUM LID WITH MOUNTING BOLTS ATTACHED TO POLY BASE TO SECURE IN SOIL. PART NOS. QP-MPE
12. POURED CONCRETE BASE - 6" MIN. THICKNESS - EXTEND CONCRETE 6" BEYOND OUTSIDE DIMENSION OF ENCLOSURE WITH  $\frac{1}{2}$ % SLOPE AWAY FOR DRAINAGE.
13. STAINLESS ANCHOR BASE INSTALLED DURING CONCRETE POUR AND CONDUIT PLACEMENT
14. UTILITY LANDING LUG COMPARTMENT



## MPE-SERIES SERVICE PEDESTAL

N.T.S.