





MPS-SERIES WITH ENCLOSURE
INSTALLED ON CONCRETE PAD

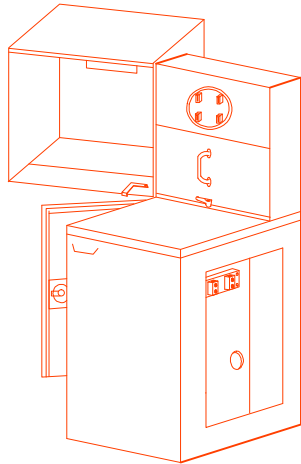

OPTIONAL
CONCRETE
FRAME

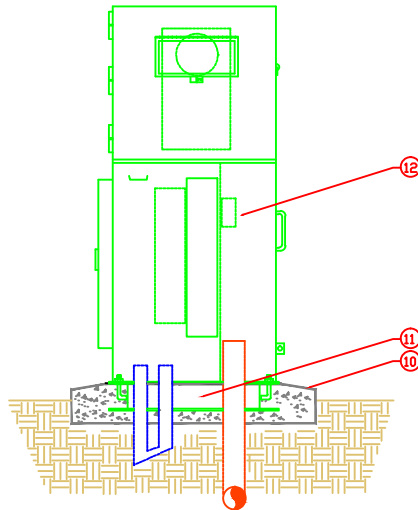

MPS-SERIES WITH ENCLOSURE
INSTALLED WITH STRONGBOX QUICKPAD
(QP-MPS)

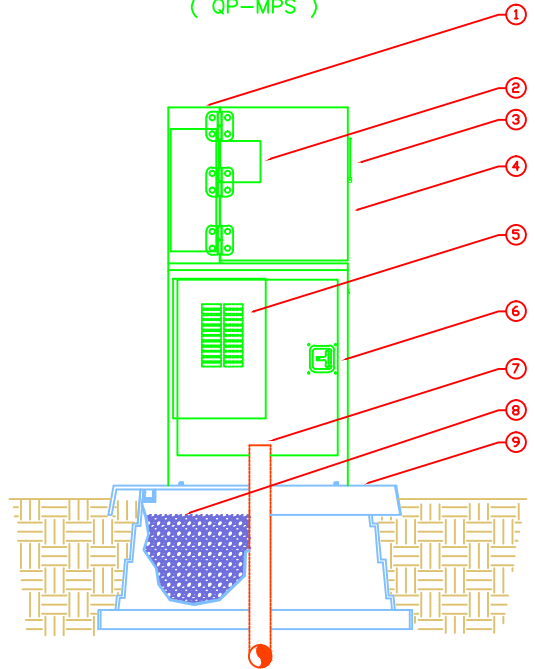

LEGEND

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. STRONGBOX SERVICE PEDESTAL STAINLESS STEEL NEMA TYPE 3R MPS-SERIES 0-200AMP SERVICE 2. COMMERCIAL METER SOCKET 100A OR 200A WITH TEST BLOCKS 3. SERVICE METER VIEWING WINDOW 4. SIDE HINGED REMOVABLE FRONT LID 5. LOAD CENTER WITH MAIN BREAKER 6. LOAD CENTER COMPARTMENT, GASKETED DOOR WITH T-HANDLE, PADLOCKABLE. 7. SERVICE LINE CONDUIT 3" FROM UTILITY TRANSFORMER. WIRE SIZE PER NEC STANDARDS FOR AMPERAGE LOAD. | <ol style="list-style-type: none"> 8. PEA GRAVEL $\frac{3}{4}$ FULL INSIDE QUICKPAD BASE 9. QUICKPAD MOUNTING PAD. POWDER COATED ALUMINUM LID WITH MOUNTING BOLTS ATTACHED TO POLY BASE TO SECURE IN SOIL. PART NOS. QP-MPS 10. POURED CONCRETE BASE - 6" MIN. THICKNESS - EXTEND CONCRETE 6" BEYOND OUTSIDE DIMENSION OF ENCLOSURE WITH $\frac{1}{2}$% SLOPE AWAY FOR DRAINAGE. 11. STAINLESS ANCHOR BASE INSTALLED DURING CONCRETE POUR AND CONDUIT PLACEMENT PART NO. MPS-BASE 12. UTILITY LANDING LUG COMPARTMENT |
|---|--|



STRONGBOX MPS-SERIES SERVICE PEDESTAL

N.T.S.