



STRONGBOX DOUBLE
DOOR ENCLOSURE

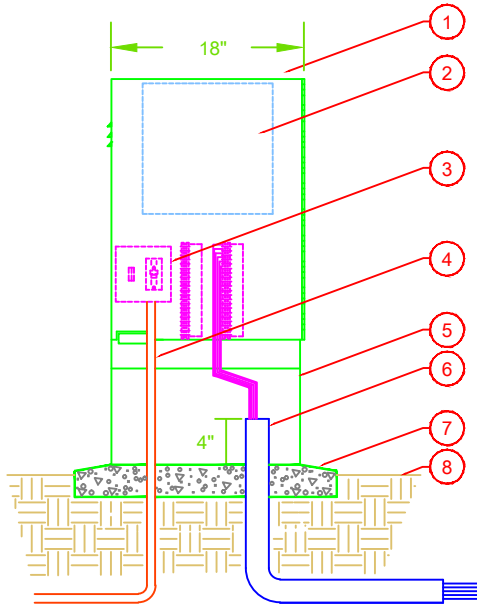


STRONGBOX DOUBLE
DOOR ENCLOSURE
(SIDE VIEW)

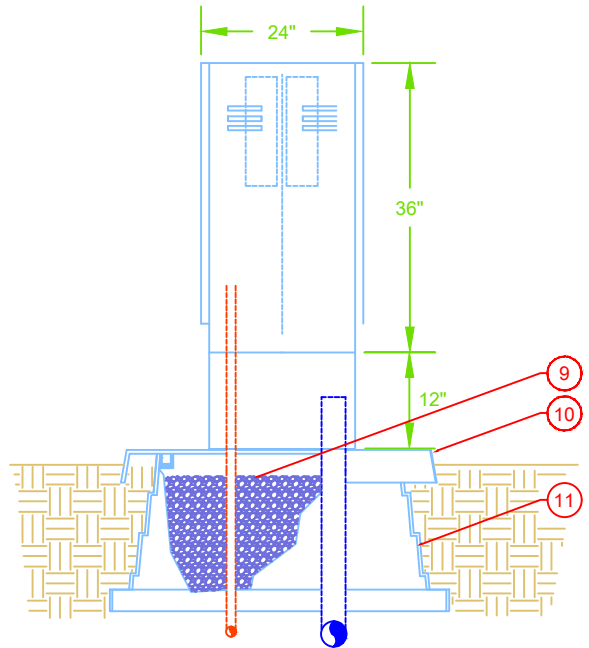

LEGEND

- | | |
|--|--|
| <p>1. STRONGBOX DOUBLE DOOR ENCLOSURE BACK TO BACK
PN# SB-18DSS, SB-24DSS</p> <p>2. AUTOMATIC CONTROLLER.</p> <p>3. CONTROLLER SUBASSEMBLY (CSA)
INCLUDES GFI, SWITCH, TERMINAL STRIPS WITH PLACARDS</p> <p>4. 120-VOLT SERVICE IN CONDUIT.</p> <p>5. PEDESTAL RISER, PED-18DSS, OPTIONAL.</p> <p>6. PVC CONDUIT OUT TO CONTROL VALVES</p> | <p>7. POURED CONCRETE BASE, 6" MIN. THICKNESS EXTENDING 4" BEYOND OUTSIDE DIMENSIONS OF ENCLOSURE WITH 1/2% SLOPE FOR DRAINAGE.</p> <p>8. FINISH GRADE.</p> <p>9. 3/8" GRAVEL TO FILL INSIDE VOID AROUND CONDUITS IN QUICKPAD.</p> <p>10. STRONGBOX QUICKPAD DESIGNED TO ACCEPT ENCLOSURES AND SECURE INTO SOIL PN# QP-18D, SB-24D</p> <p>11. QUICKPAD POLY MOUNTING BASE WITH COMPACTED SOIL TO SECURE.</p> |
|--|--|



STRONGBOX DOUBLE DOOR PEDESTAL

N.T.S.